



IES6210 Series

DIN-Rail or Wall Mounting

6/10-port 100M/Gigabit Layer 2 Managed Industrial PoE Ethernet Switch

- Support 2 Gigabit Combo ports(SFP slot or RJ45) and 4/8 100M copper ports (optional PoE)
- The maximum power of single PoE port is 30W
- Adopt SW-Ring patent technology, support single ring, coupling ring, chain, Dual-homing, automatic recovery time of network failure < 20ms
- Support optional AC/DC power supply, DC dual power supply redundancy
- Support -40~75℃ wide operating temperature range



Introduction

IES6210 series are 6/10-port 100M/Gigabit layer 2 managed industrial Ethernet switches. This series provide 100M copper port (optional PoE) and Gigabit Combo port (SFP slot or RJ45), and the PoE power supply conforms to the protocol standard of IEEE802.3af/at. They also adopt DIN-Rail or wall mounting, which can meet the requirements of different scenes.

Network management system supports various network protocols and industrial standards, such as STP/RSTP, 802.1Q VLAN, QoS, LLDP, PoE Configuration, IGMP Static Multicast, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Port Statistics, Access Control, Modbus TCP Monitoring, Network Diagnosis, Rapid Configuration, Online Upgrading and so on, and supports CLI, WEB, Telnet, SNMP and other access methods. It can provide users with good experience with friendly design of network management system interface, simple and convenient operation.

This series support optional AC/DC power supply. And the DC power supply input is two independent power supply circuits which can ensure the normal operation of the device when one power supply fails. The design of DIP switch can implement restoring factory settings. When power supply or port has link failure, ALM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

Features and Benefits


- ⦿ SNMPv1/v2c is used for network management of various levels
- ⦿ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⦿ QoS supports real-time traffic classification and priority setting
- ⦿ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⦿ File management is convenient for rapid configuration and online upgrade of the device
- ⦿ Port statistics can be used for the port real time traffic statistics
- ⦿ User password can conduct user hierarchical management to improve the device management security
- ⦿ Relay alarm is convenient for troubleshooting of construction site
- ⦿ Storm suppression can restrain the broadcast, unknown multicast and unknown

- unicast
- ⦿ VLAN is used for simplifying network planning
- ⦿ Port Trunking and LACP can increase network bandwidth and enhance the reliability of network connection to achieve optimum bandwidth utilization
- ⦿ Bandwidth management can reasonably distribute network bandwidth, preventing unpredictable network status
- ⦿ IGMP Snooping and static multicast can be used for filtering multicast traffic to save the network bandwidth
- ⦿ SW-Ring and STP/RSTP can achieve network redundancy, preventing network storm
- ⦿ Optical fiber diagnosis and troubleshooting can be conducted via SFP DDM
- ⦿ PoE could power device over Ethernet, thus decreasing the cable connection of powered devices
- ⦿ Support Modbus TCP protocol, which could monitor device information in real time
- ⦿ Loop protection could send TRAP alarm to prevent ring network storm


Dimension

Unit:mm

- AC power supply

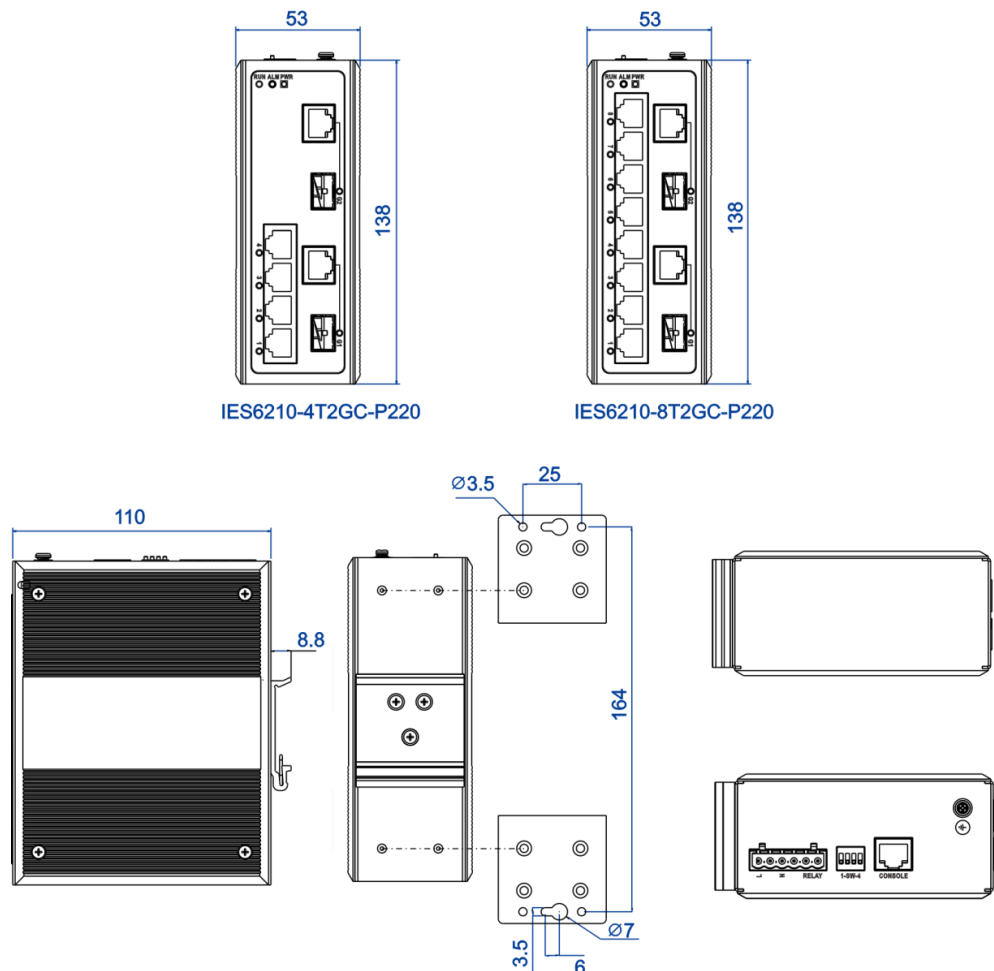

- DC power supply

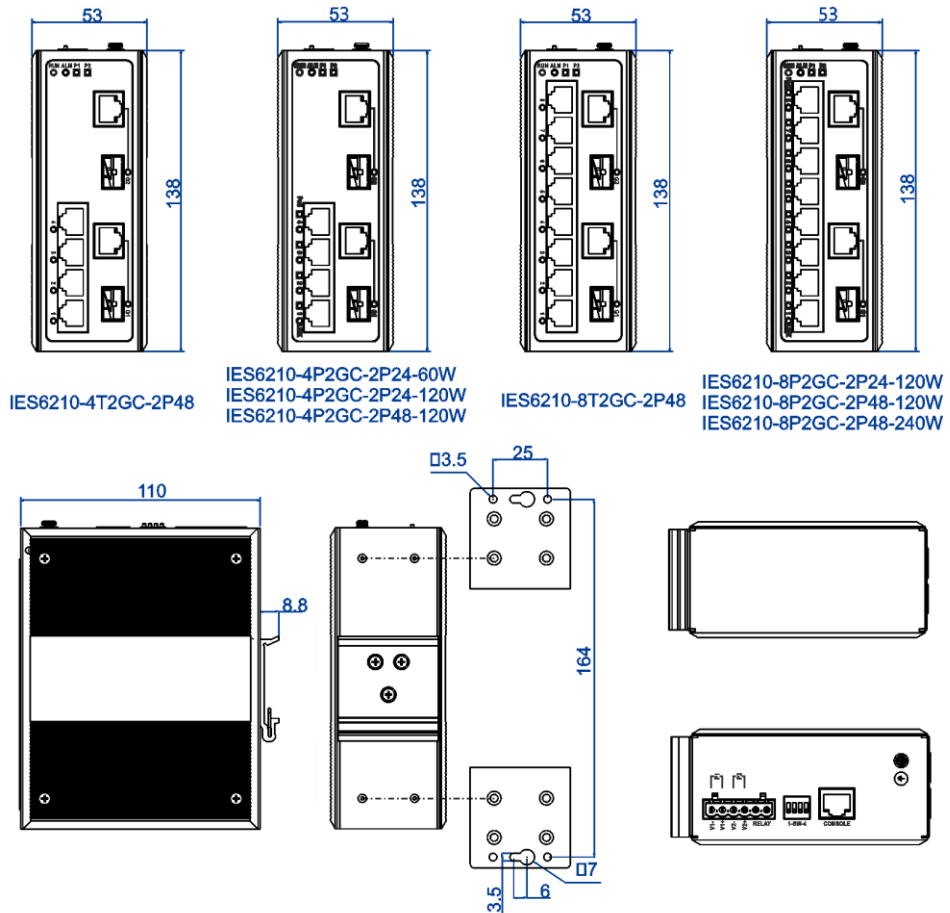

Specification

| | |
|--------------------------------|---|
| <p>Standard & Protocol</p> | <p>IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1Q for VLAN IEEE 802.1p for CoS IEEE 802.3ad for LACP IEEE 802.3af for PoE IEEE 802.3at for PoE+ GB/T 19582 for Modbus TCP</p> |
|--------------------------------|---|

| | |
|-------------------|---|
| <p>Management</p> | <p>SNMP v1/v2c Centralized Management of Equipment, Modbus TCP Monitoring, Port Mirroring, QoS, LLDP, DHCP Client, File Management, Port Statistics</p> |
|-------------------|---|

| | |
|-------------------------|--|
| Security | Classification of User Permissions, Port Alarm, Power Supply Alarm, Storm Suppression, SFP DDM |
| Switch Function | 802.1Q Vlan, Static Port Aggregation, Bandwidth Management, Flow Control |
| Unicast / Multicast | Static Multicast, IGMP-Snooping |
| Redundancy Protocol | SW-Ring, STP/RSTP |
| Time Management | SNTP |
| PoE | The maximum power of single PoE port: 30W The power supply pin of PoE: V+, V-, V+, V- correspond to Pin 1, 2, 3, 6 |
| Interface | 100M copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning Combo port: 10/100/1000Base-T(X) or 1000Base-X Console port: CLI command line management port (RS-232), RJ45 Alarm port: 6-pin 5.08mm pitch terminal blocks, including 2-pin alarm terminal blocks, support 1 relay alarm output, current carrying capacity is 1A@30VDC or 0.3A@125VAC |
| LED Indicator | Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator, PoE Indicator (only for PoE products) |
| Switch Property | Transmission mode: store and forward MAC address: 8K Packet buffer size: 1Mbit Backplane bandwidth: 7.6G Switch time delay: <10 μ s |
| Power Requirement | Optional 24VDC, 48VDC or 220VAC, 6 pins 5.08mm pitch terminal blocks, including 4 pins power supply terminal blocks DC dual power supply redundancy, anti-reverse connection |
| Power Consumption | <ul style="list-style-type: none"> No-load: $\leq 4.9W @ 48VDC$ Full-load: $\leq 122.8W @ 48VDC$ |
| Environmental Limit | Operating temperature range: -40~75 $^{\circ}C$ Storage temperature range: -40~85 $^{\circ}C$ Relative humidity: 5% ~ 95%(no condensation) |
| Physical Characteristic | Housing: IP40 protection, metal |

| | |
|--|---|
| | Installation: DIN-Rail or wall mounting Dimension (W x H x D): 53mm×138mm×110mm Weight: ≤0.62kg |
|--|---|

IEC 61000-4-2 (ESD), Level 3

- Air discharge: ±8kV
- Contact discharge: ±6kV

IEC 61000-4-4 (EFT), Level 3

- Power supply: ±2kV
- Ethernet port: ±1kV
- Relay: ±2kV

Industrial Standard

IEC 61000-4-5 (Surge), Level 3

- Power supply: common mode±2kV, differential mode±1kV
- Ethernet port: common mode±2kV, differential mode±1kV
- Relay: common mode±2kV, differential mode±1kV

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

| | |
|---------------|---------------|
| Certification | CE, FCC, RoHS |
|---------------|---------------|

Warranty 5 years



Ordering Information

| Model | Gigabit Combo | 100M Copper Port | 100M POE Copper Port | Power Supply | PoE Power |
|-------------------------|---------------|------------------|----------------------|-------------------------------|-----------|
| IES6210-8T2GC-2P48 | 2 | 8 | - | 12~48VDC dual power supply | - |
| IES6210-8T2GC-P220 | 2 | 8 | - | 85~264VAC single power supply | - |
| IES6210-4T2GC-2P48 | 2 | 4 | - | 12~48VDC dual power supply | - |
| IES6210-4T2GC-P220 | 2 | 4 | - | 85~264VAC single power supply | - |
| IES6210-8P2GC-2P24-120W | 2 | - | 8 | 24VDC dual power supply | 120W |
| IES6210-8P2GC-2P48-120W | 2 | - | 8 | 48VDC dual power supply | 120W |
| IES6210-8P2GC-2P48-240W | 2 | - | 8 | 48VDC dual power supply | 240W |
| IES6210-4P2GC-2P24-60W | 2 | - | 4 | 24VDC dual power supply | 60W |
| IES6210-4P2GC-2P24-120W | 2 | - | 4 | 24VDC dual power supply | 120W |
| IES6210-4P2GC-2P48-120W | 2 | - | 4 | 48VDC dual power supply | 120W |



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.