





## **MODEL1200 Series**

Wall or DIN-Rail Mounting 3-port 100M Media Converter

- Support 1 100M fiber port, 2 100M copper ports
- Support built-in power supply 220VAC, 48VDC, external power supply 5VDC
- Support -10~60°C wide operating temperature range







### Introduction


MODEL1200 series are 3-port 100M media converter. It can convert Ethernet electrical signal into Ethernet optical signal to extend the transmission distance. It also has good isolation protection and data confidentiality. This series include three types of products with different mains input methods and provide 100M copper port, 100M fiber port. It adopts DIN-Rail or wall mounting to meet the requirements of different application scenes.

This series of products conform to CE, FCC certification standards. Hardware adopts fanless, low power consumption, wide temperature and voltage design, which can suit for the scene environment with harsh requirements. It can be widely used in various fields.


### **Dimension**

### Unit:mm


External power supply 5VDC

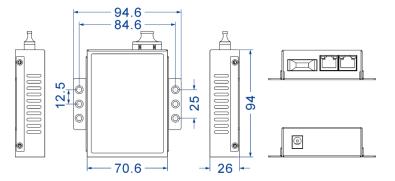

Built-in power supply 220VAC

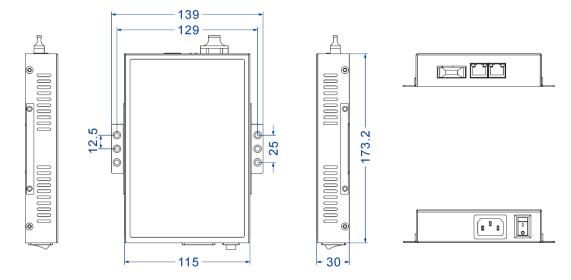

Built-in power supply 48VDC

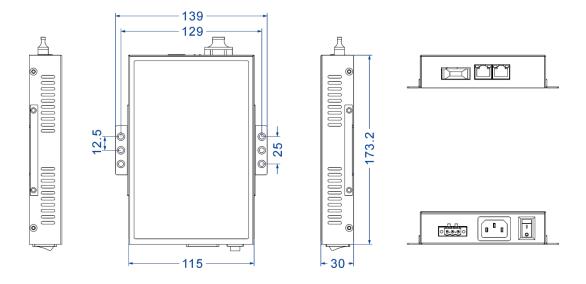

# **Specification**

Standard & Protocol   IEEE 802.3 for 10Base-T   IEEE 802.3u for 100Base-TX and 100Base-FX			
Copper Port  mode, MDI/MDI-X autotunning  Standard: 100Base-FX Connection mode: SC/ST/FC optional  Transmission distance:  • Multimode: 2km • Single mode: 20/40/60/80/100/120km  Fiber cable: • Multimode: 50/125μm or 62.5/125μm • Single mode: 8.3/125μm, 8.7/125μm, 9/125μm or 10/125μm  Transmission wavelength: • Multimode: 1310nm • Single mode: 1310nm or 1550nm  LED Indicator  Power Requirement  Support three kinds of mains input methods • External 5VDC, DC round head • Built-in 220VAC, AC socket with switch	Standard & Protocol		
Connection mode: SC/ST/FC optional  Transmission distance:  Multimode: 2km Single mode: 20/40/60/80/100/120km  Fiber Port  Fiber cable: Multimode: 50/125µm or 62.5/125µm Single mode: 8.3/125µm, 8.7/125µm, 9/125µm or 10/125µm  Transmission wavelength: Multimode: 1310nm Single mode: 1310nm or 1550nm  LED Indicator  Port indicator, power supply indicator  Support three kinds of mains input methods External 5VDC, DC round head Built-in 220VAC, AC socket with switch	Copper Port		
Support three kinds of mains input methods  External 5VDC, DC round head  Built-in 220VAC, AC socket with switch	Fiber Port	Connection mode: SC/ST/FC optional  Transmission distance:  Multimode: 2km Single mode: 20/40/60/80/100/120km  Fiber cable: Multimode: 50/125µm or 62.5/125µm Single mode: 8.3/125µm, 8.7/125µm, 9/125µm or 10/125µm  Transmission wavelength: Multimode: 1310nm	
Power Requirement  External 5VDC, DC round head  Built-in 220VAC, AC socket with switch	LED Indicator	Port indicator, power supply indicator	
	Power Requirement	<ul> <li>External 5VDC, DC round head</li> <li>Built-in 220VAC, AC socket with switch</li> </ul>	

## $Your\,Reliable\,Industrial\,Communication\,Expert$

	Power Consumption	4W
	Environmental Limit	Operating temperature: $-10\sim60^{\circ}\text{C}$ Storage temperature: $-20\sim70^{\circ}\text{C}$ Relative humidity: $5\%\sim95\%$ (no condensation)
	Physical Characteristic	Housing: metal Installation: wall or DIN-Rail mounting Dimension (W x H x D): 70.6mm×26mm×94mm (external power supply) 115mm×30mm×173.2mm (built-in power supply)
	Certification	CE, FCC, RoHS
	Warranty	3 years



## **Ordering Information**

Available Models	100M Fiber Port	100M Copper Port	Power Supply Range
MODEL1200-5VDC	1	2	5VDC
MODEL1200-220VAC	1	2	220VAC
MODEL1200-48VDC	1	2	48VDC



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com Website: www.3onedata.com

◀ Please scan our QR code for more details

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.